


BIN

SDCM

CCT · 3859K, BIN · E40


ENERGY STAR ANSI C78.377-2011

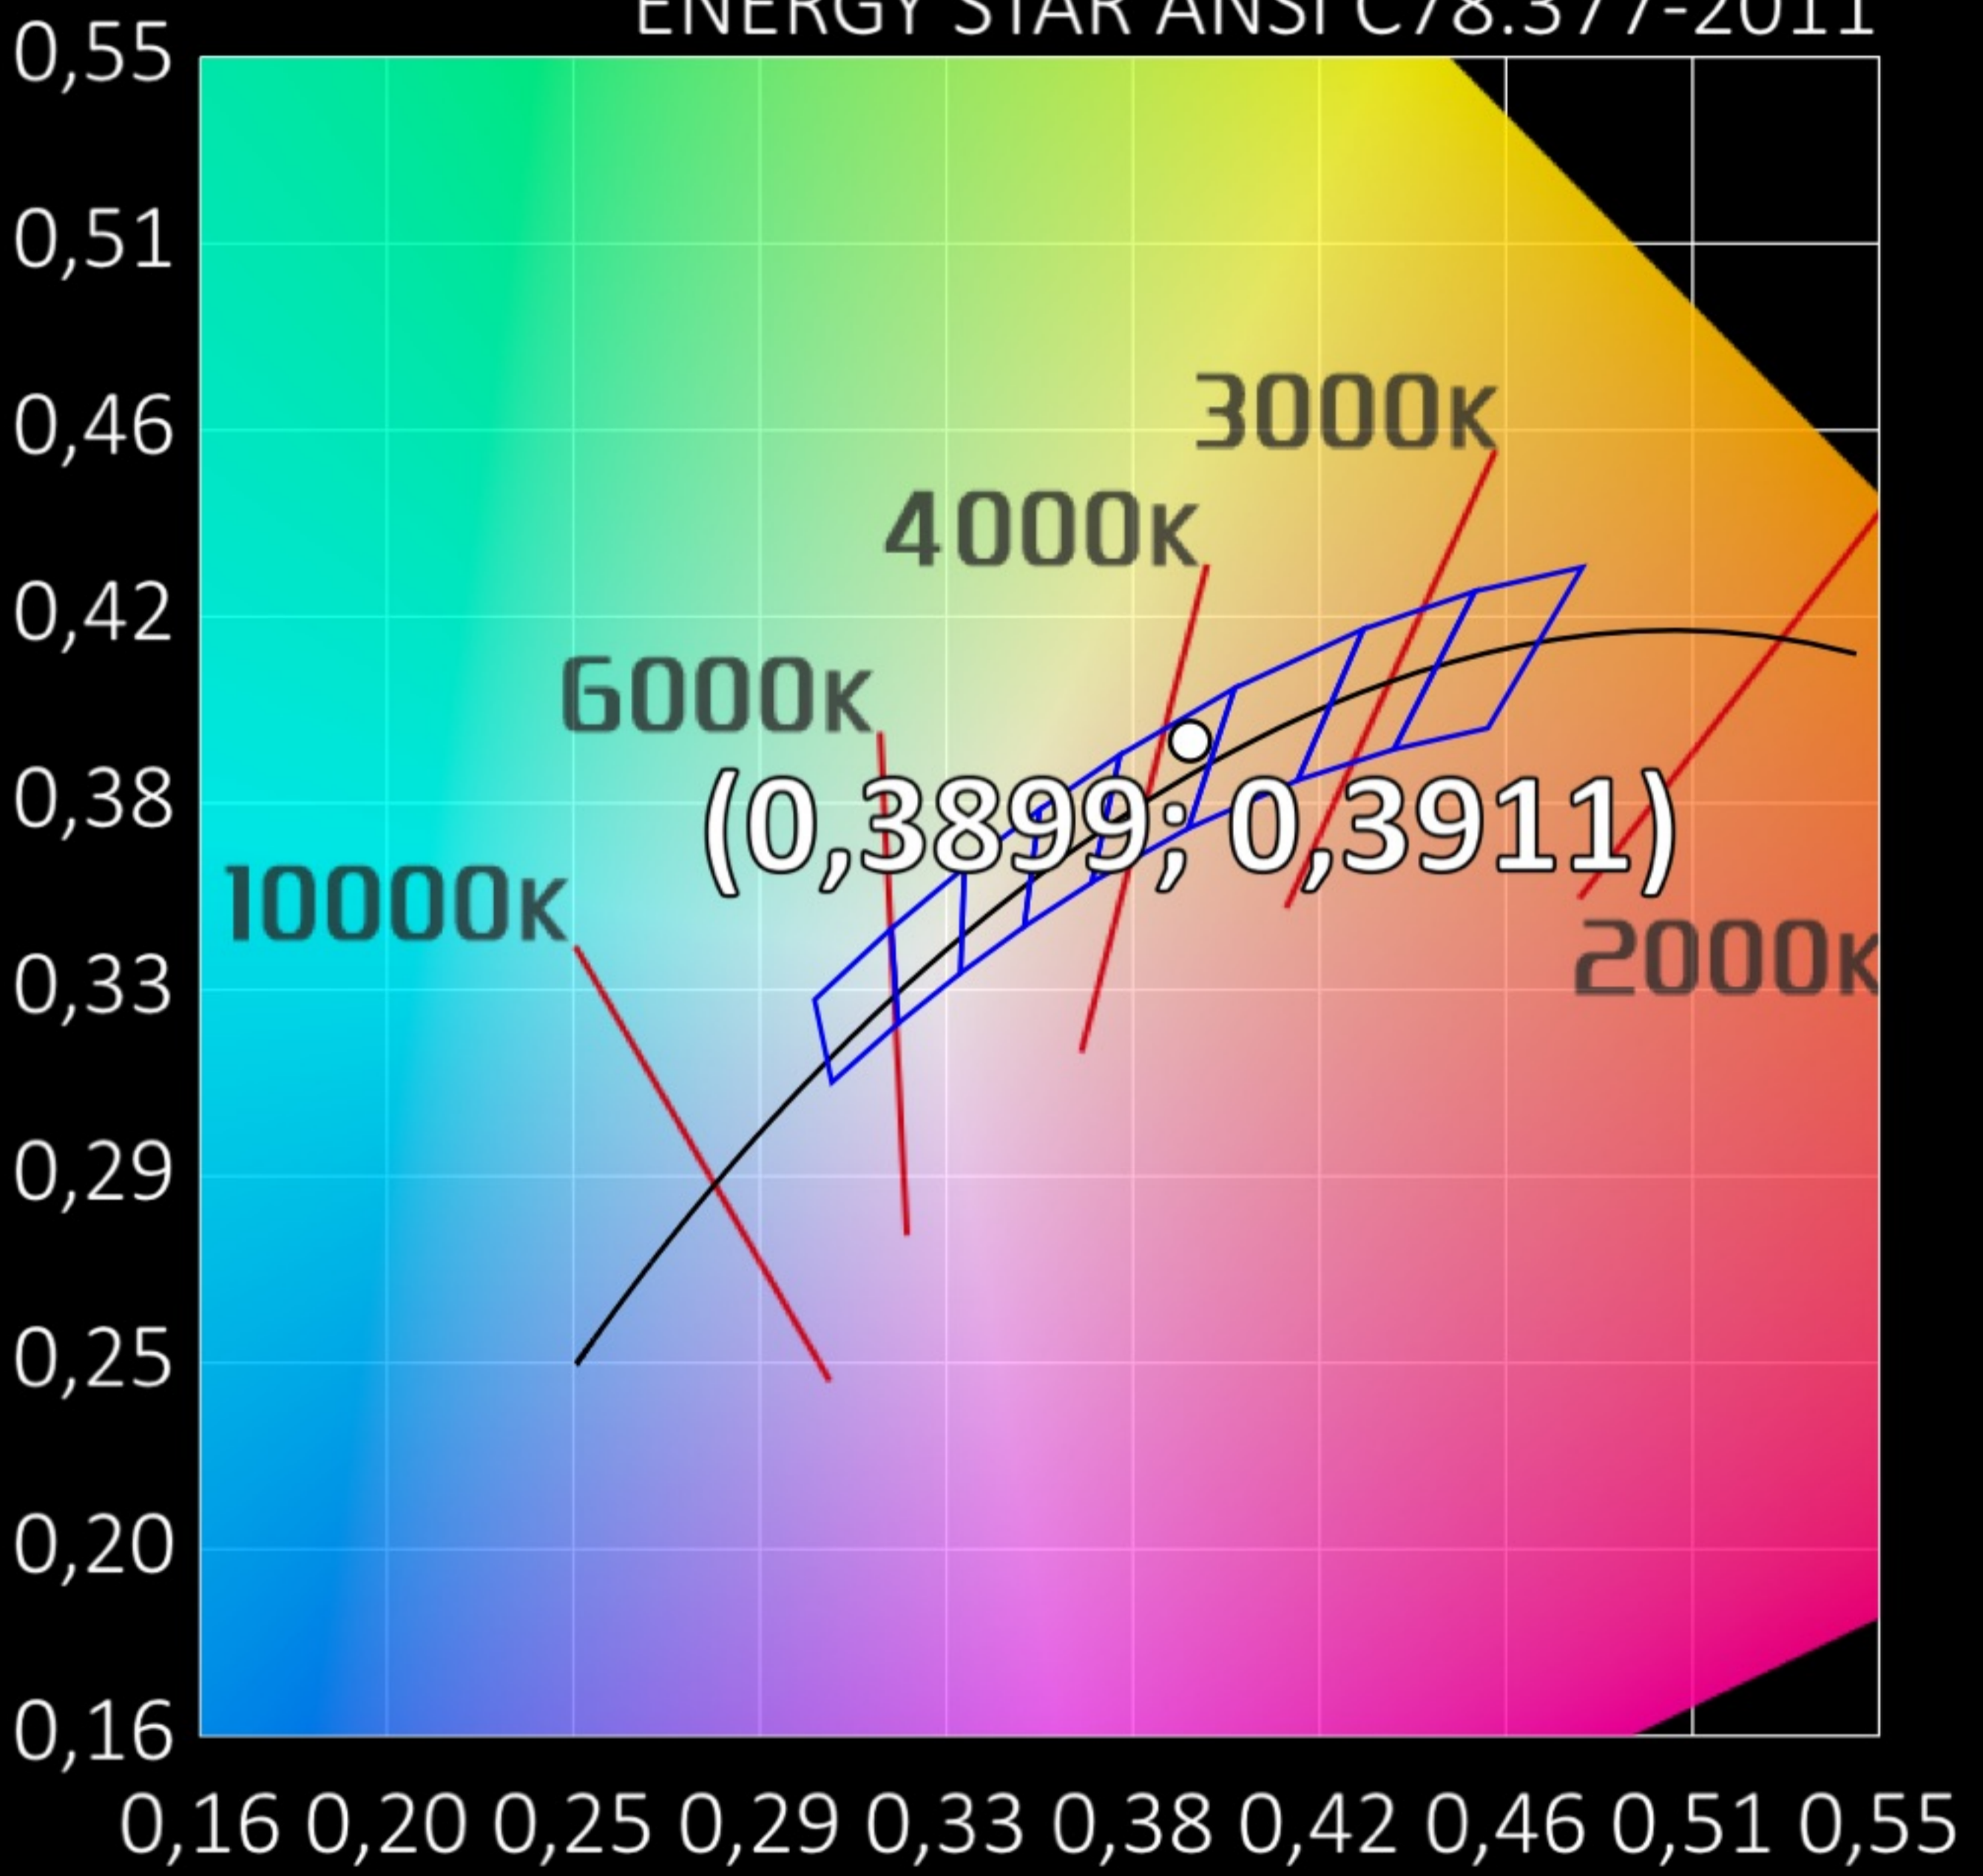

BIN

SDCM

CCT · 3859K, SDCM · 4.9

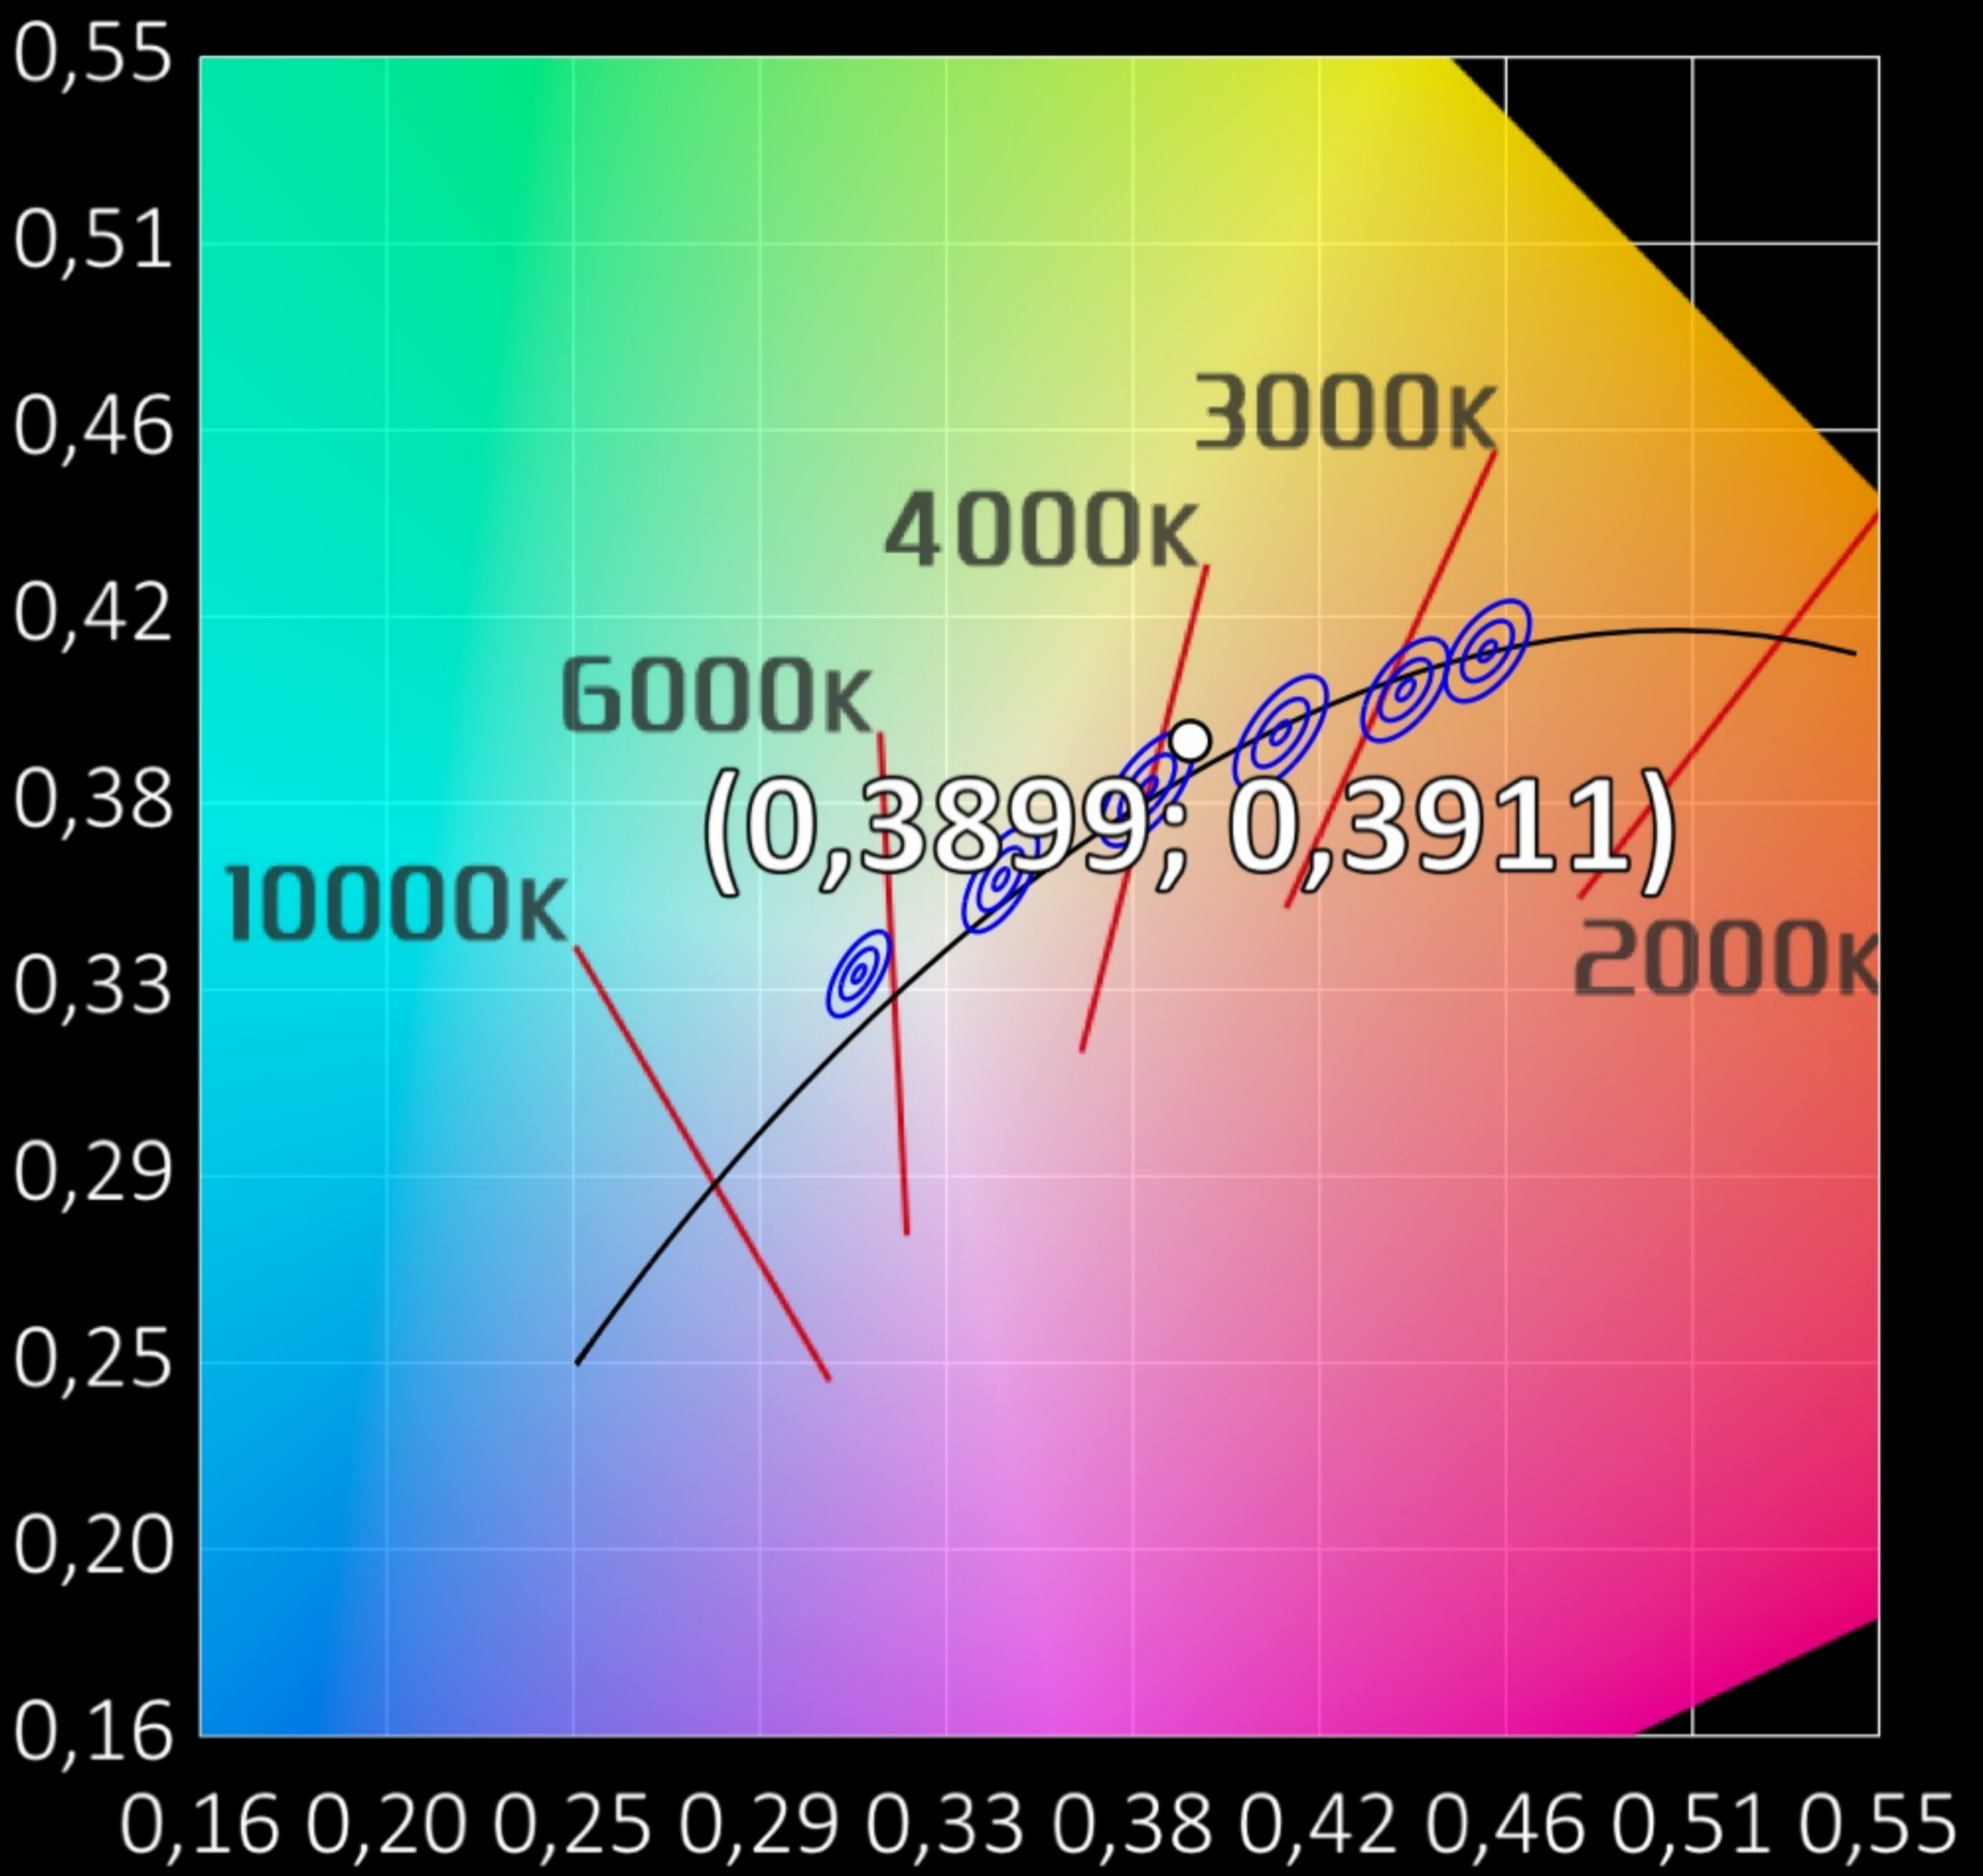

**Eb**

2.88335 w/m<sup>2</sup>

**Kb,v**

0.00043 w/lm

**BL**

17.09 %

**RG**

Moderate

R G

Definition

Tmax(s)

RG0

Exempt

>10000 sec

RG1

Low

>100~10000 sec

RG2

Moderate


0.25~100 sec

RG3

Hight

< 0.25 sec

CCT · 3859K

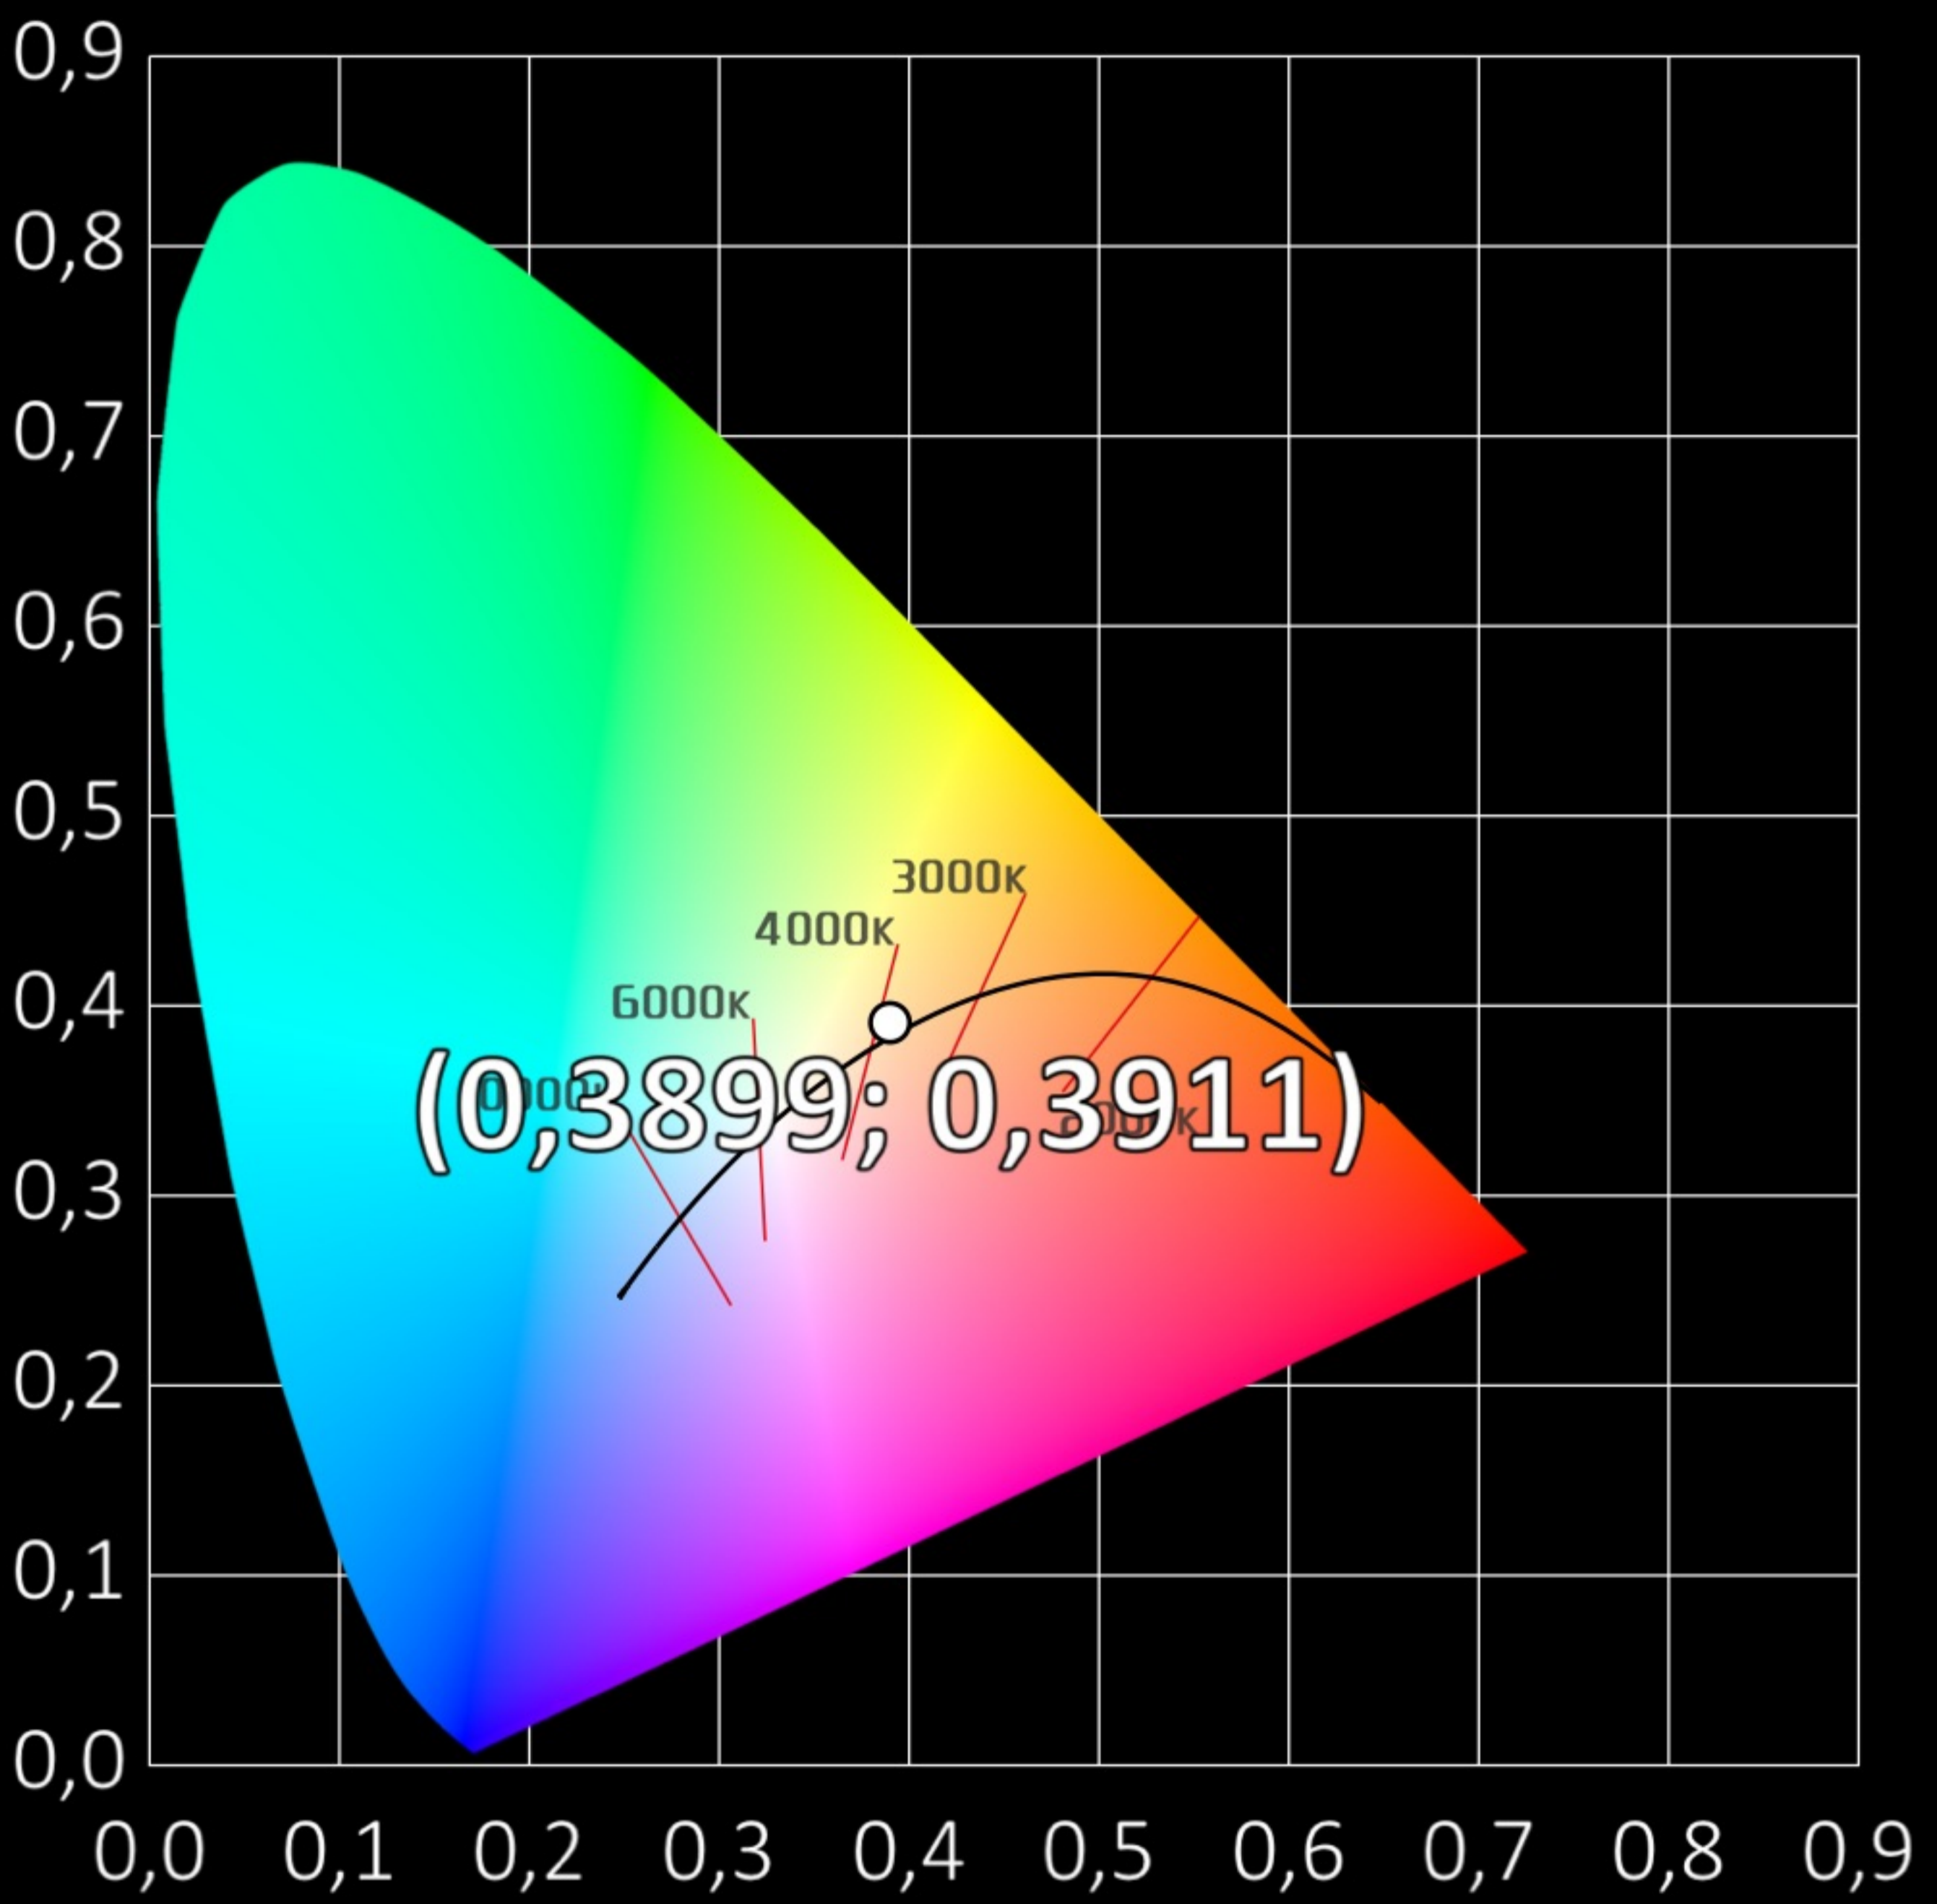

mW/m<sup>2</sup>

111,61

100,45

89,29

78,13

66,97

55,80

44,64

33,48

22,32

11,16

0,00

380 420 460 500 540 580 620 660 700 740 780

**(630 nm; 111,61 mW/m<sup>2</sup>)**

